



PRODUCT INFORMATION SHEET

FLOATING MATS

Protecting uptime through floor-level contamination control.



Ready to Deploy



Static Dissipative



3 Year Lifespan

Contamination control that moves with your facility

Dycem Floating Mats capture up to **99.9%** of shoe- and wheel-borne contamination and reduce airborne contamination by up to **75%**. Their portable design provides flexible protection wherever permanent installation is not practical.

Lightweight, low-profile and easy to clean, Floating Mats provide flexible contamination control.



Reusable

Long-lasting contamination control that reduces waste and lowers total cost of ownership.



Sustainable

Sustainable alternative, reducing the need for single-use plastics and contaminated waste.



Easy to Use

Ready for placement and use, with no adhesives or permanent installation required.

WHY CHOOSE DYCEM FLOATING MATS?



Customizable

Choose from a range of colors and sizes.




Easy to Clean

Integrate into existing procedures.



Compliant

Designed to support best-practice under ISO guidelines.

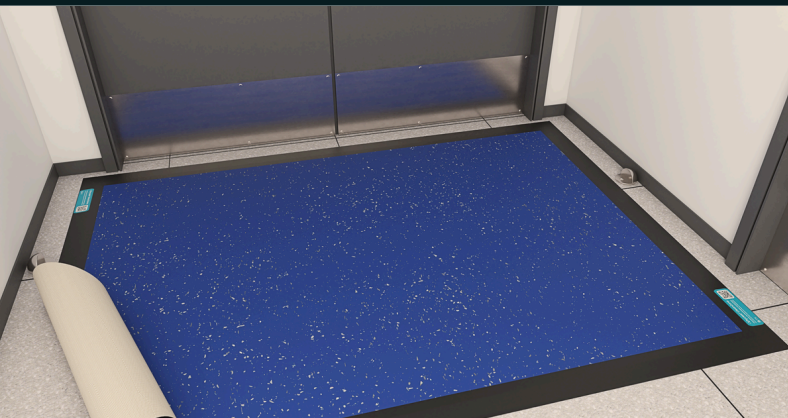

COMPLIANCE



MAT COLORS



Midnight



Slate



Green



Red



Cobalt



Titanium

EDGING COLORS



Available in a range of color, sizes and edging options.

TECHNICAL SPECIFICATIONS

SIZE	Nominal Thickness: 3.6 mm Width: 1.2 m or 2.0 m Length: Custom, up to 3.6 m	CLEANING	Controlled manual clean. Cleaned according to facility specifications and Dycem SOP's.
WEIGHT	Nominal: 4 kg/m²	TOXICITY	Non-toxic, silicon, latex and melamine-free, no known adverse skin reactions
SURFACE RESIVITY	10 ⁸ ohms (tested to ASTM F150, DIN 51953, BS 2050)	OFFGASSING	Requirements met for ISO 16000-3, ISO 16000-6, ISO 16000-9 and ISO 16000-11
LOAD RESISTANCE	Pedestrian traffic (70 kg/cm²)	UV & HEAT RESISTANCE:	Working range 0-50° C. Constant exposure to light will degrade surface.
CO-EFFICIENT OF FRICTION	≥ 0.30 in accordance with EN 13893 - Technical class DS		
FLAMMABILITY	EN 14041:2004		

Protecting Uptime. **Protecting what matters.**

dycemdatacenters.com



Get in Touch